



## America's #1 Turf Equipment Lift



The Patented GL-9 is now "Certified" to the rigid OSHA recognized ANSI/ALI ALCTV-2006 turf/auto lift standard. This new ANSI standard is the only standard that provides inclusion for lifting turf equipment. The GL-9, America's #1 Turf Equipment Lift, passed this validation process and has earned the right to wear the ALI/ETL Gold Label shown above.



800-788-9789  
[www.golf-lift.com](http://www.golf-lift.com)



**The Model GL-9**

comes as a complete system for lifting by the tires or by the frame. Accomplish all your lifting needs from walk mowers, triplexes, fairway mowers, and large rough cut mowers to full-size trucks. With no options to buy, the GL-9 is the most flexible and complete Lift System in the industry.

**The Patented GL-9 with the Tire-Wedge Turf Arm System**

Golf-Lift's patented GL-9 with the Tire-Wedge™ Turf Arm System pivots from the column, telescopes directly to the tire and adjusts to the tire size. This system requires no changing of adapters to change vehicles. From walkers (which can be loaded up to 4 at a time) to 3 & 4 wheel equipment the GL-9 provides total turf vehicle coverage up to 9,000-lb. capacity. The Tire-Wedge allows the GL-9 to expose the entire undercarriage of the vehicle and creates the most obstacle-free working environment in the industry. Maximum productivity is achieved by taking up the least amount of floor space and removing all obstacles found on other lifts. The GL-9 eliminates all protruding beams, ramps, runways and overhead beams found on other units. It is simply wide open for the technician to work around.

**No Beam Obstacle**

The GL-9 has NO Overhead beam to interfere with roll bars (ROP's), canopies or low ceilings and provides easier installation. This design (over 30 years in service) never limits your lifting height and means operators never waste time repositioning vehicles with canopies or roll bars to miss an overhead beam. Why have the obstacle if you don't need it? Our Low Profile floor cover is the lowest in the industry at 1' tall and is gently ramped for rolling oil drains, jacks and tool boxes over with ease.

**The Original**



**Get It Up**



**POWDER COATED TOUGH™**



\*Arm pivots at the column and at the Tire-Wedge™ for direct connection to the tire. \*The telescopic arms easily adjust to wheelbase lengths.

**5 Year Warranty**

**Accessories Increase Productivity**



GL-RT Reel Truck

TX-8G 8 gallon Oil Lift Drain

TX-3315 2-Ton Jack Stand



GL-TA Frame/Truck Kit



**ISO-9001 Certified Manufacturing**

**GL-TA Frame Kit, Quickly converts**

The model GL-TA Frame/Truck Kit allows the GL-9 to quickly change into a Frame/Truck lift. Simply pull 2 pins to change from the Tire-Wedge turf arms to frame/truck arms in a couple of minutes. This option lifts by the frame for wheels free access on Gators, Cushmans, Workmans, and Golf Carts as well as cars and trucks with up to 9,000-lb capacity.

**Safety**

The GL-9 is certified to the rigid OSHA recognized ANSI/ALI ALC-TV-2006 turf/auto lift standard. To validate this claim, ALI requires the lift to be 3rd party tested by the nationally recognized ETL testing lab and engineers. The GL-9 passed this validation process and has earned the right to wear the ALI/ETL Gold Label (see front page). Here are a few of the required safety standards:

- \* Minimum safety factors include; 1.5:1 for the pumps, 3:1 for ductile metal strength, valves, fittings & cylinders and 4:1 for hoses & fasteners.
- \* Lift is physically loaded and tested to 1.5 times the rated load capacity.
- \* The lifts must include installation and operating manuals with inspection and maintenance instructions.
- \* Standardized safety labels are installed and auto lifting point information is included.

**Nothing Else Compares**

**SPECIFICATIONS:**

GL-9	No Overhead Beam
Style	No Overhead Beam
Capacity for Turf	9000 lbs.
Capacity for Truck	9000 lbs
Lifting Height	72"
Overall Height	111"
Overall Width	138"
Width between posts	111"
Max. Tread Width -Turf	98"
Max Wheel Base - Turf	90"
Max Wheel Base-Truck	172"
Power Unit 2 HP 1PH, 208-230V for 30 amp circuit. Concrete minimum 4" thickness minimum 3000 PSI.	

©Copyright 1997-2009 Derek Weaver Co., Inc.

Golf-Lift® is a registered trademark of Derek Weaver Co., Inc.

Tire-Wedge™ is a trademark of Derek Weaver Co., Inc.

Specifications subject to change without notice

**Raise Your Productivity and Lower Your Downtime**

**Phone**

**800-788-9789**

**E-mail**

**sales@golf-lift.com**

**Web**

**www.golf-lift.com**



## Nobody Gives You More Ways To Get It Up

- \*Increase maintenance productivity
- \*Reduce man hours up to 50%
- \*Boost employee morale
- \*Prevent injuries
- \*Maximize equipment life
- \*Raise your bottom line

**Model GL-TL** includes a Precision Ground "Surface Plate" for Aligning Reels.

The **Golf-Lift GL-TL** is our portable 6,000-lb. capacity Table Lift that has up to 4 feet of lifting height and 110 volt power. The Tabletop is 54" x 84" with a built-in precision ground "Surface Plate" (see insert). With the demand for ever lower cutting heights, this surface plate is a must for properly aligning and leveling cutting reels for the most accurate cut possible. Affordably priced to fit any budget

The GL-TL also converts to a swing arm style truck/auto lift by simply removing the tabletop.



**Phone**

**800-788-9789**

**E-Mail**

**sales@golf-lift.com**


**Web**

**www.golf-lift.com**


# Model GL-1 Air Operated Equipment Lift

## GL-1

Tabletop Length	93"
Width	48"
Full Rise	33"
Fully Lowered	7.25"
Weight Capacity	1000 lbs
Air Requirement	100 P.S.I.

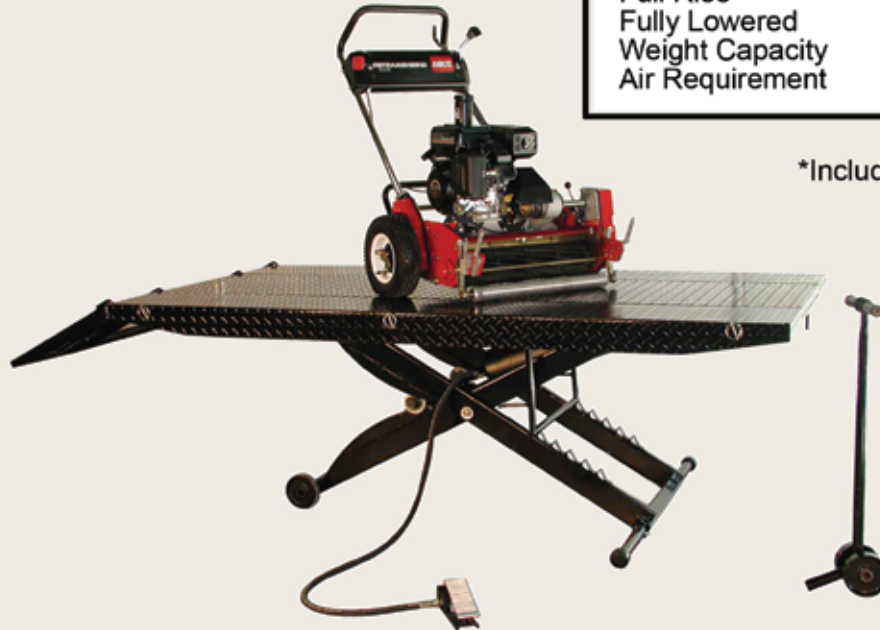

\*Includes Dolly

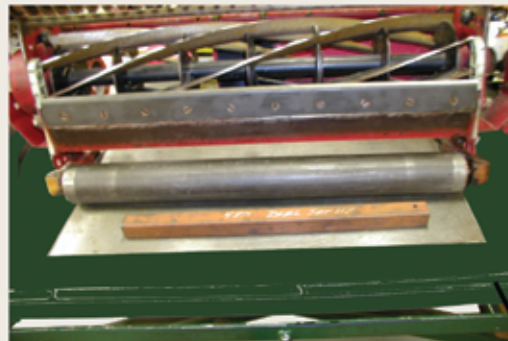

*NEW Precision Ground "Surface Plate"*

## GL-TL

### With Built-In "Surface Plate"

